


BSC

Super VSD compressor



BSC Super VSD compressor

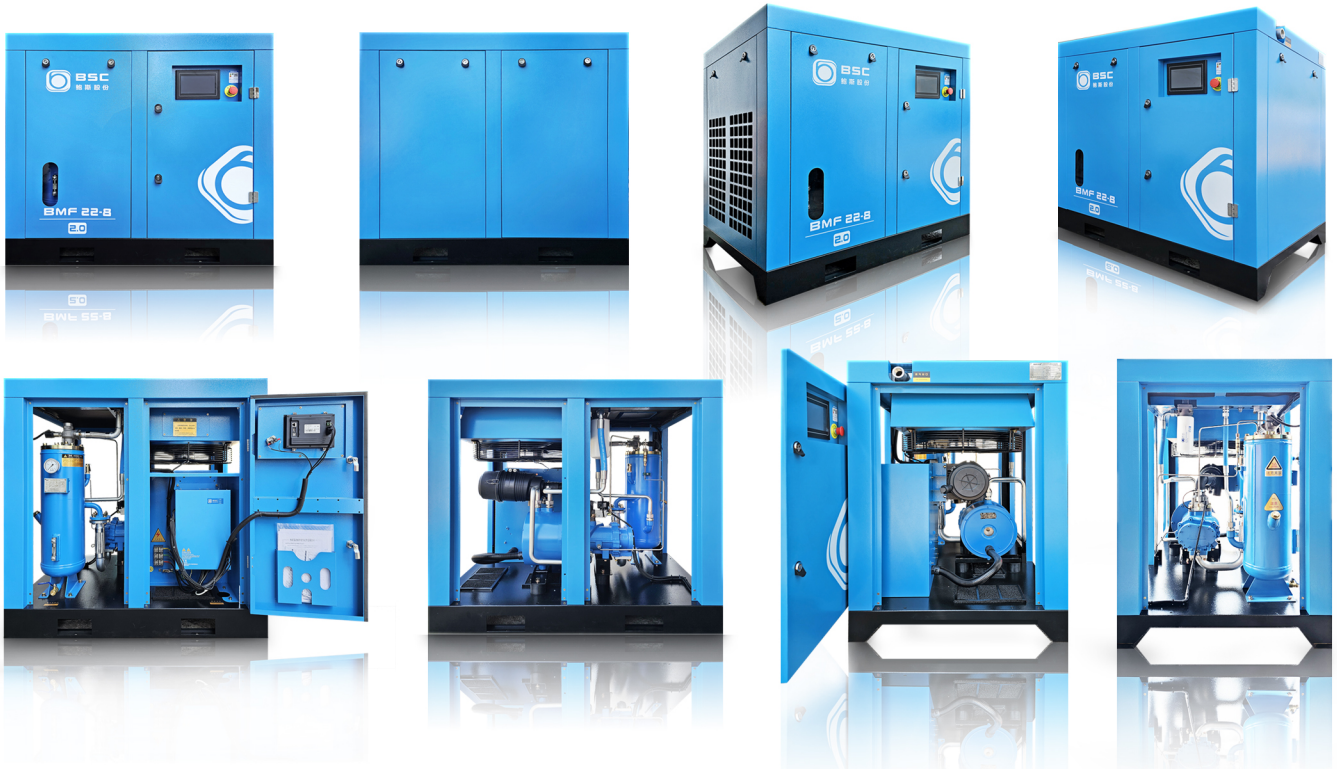

Low pressure Two stage Screw Compressor

Model	power (kW)	Pressure (bar)	Capacity (m ³ /min)	Starting Mode	Port Size	Dimension (LxWxH) mm	Weight (kg)
BMF45-5II	45	4~5	11.5	PM&VSD	DN65	2500x1600x1740	2300
BMF55-5II	55	4~5	14.7		DN65	2500x1600x1740	2400
BMF75-5II	75	4~5	19.2		DN80	2850x1800x1912	3450
BMF90-5II	90	4~5	24.2		DN80	2850x1800x1912	3500
BMF110-5II	110	4~5	27.2		DN100	3440x2000x2320	4400
BMF132-5II	132	4~5	32.5		DN100	3440x2000x2320	4500
BMF150-5II	150	4~5	38		DN125	3720x2363x2382	7200
BMF160-5II	160	4~5	40.7		DN125	3720x2363x2382	7250
BMF170-5II	170	4~5	44		DN125	3720x2363x2382	7300

Single Stage Screw Compressor

Model	Power (kW)	Pressure (bar)	Capacity (m ³ /min)	Starting Mode	Port Size	Dimension (LxWxH) mm	Weight (kg)
BMF8-8	7.5	8	1.05	PM&VSD	G3/4	930x680x920	185
BMF11-8	11	8	1.7		G3/4	1010x770x1035	265
BMF15-8	15	8	2.2		G3/4	1010x770x1035	275
BMF19-8	18.5	8	2.7		G1	1200x840x1150	380
BMF22-8	22	8	3.3		G1	1200x840x1150	400
BMF30-8	30	8	5		G1 1/2	1370x950x1360	515
BMF37-8	37	8	6.3		G1 1/2	1370x950x1360	540
BMF45-8	45	8	7.25		G2	1670x1000x1500	730
BMF55-8	55	8	9		DN65	1900x1300x1660	1100